


VF外型及安装尺寸 Outline & installation sizes

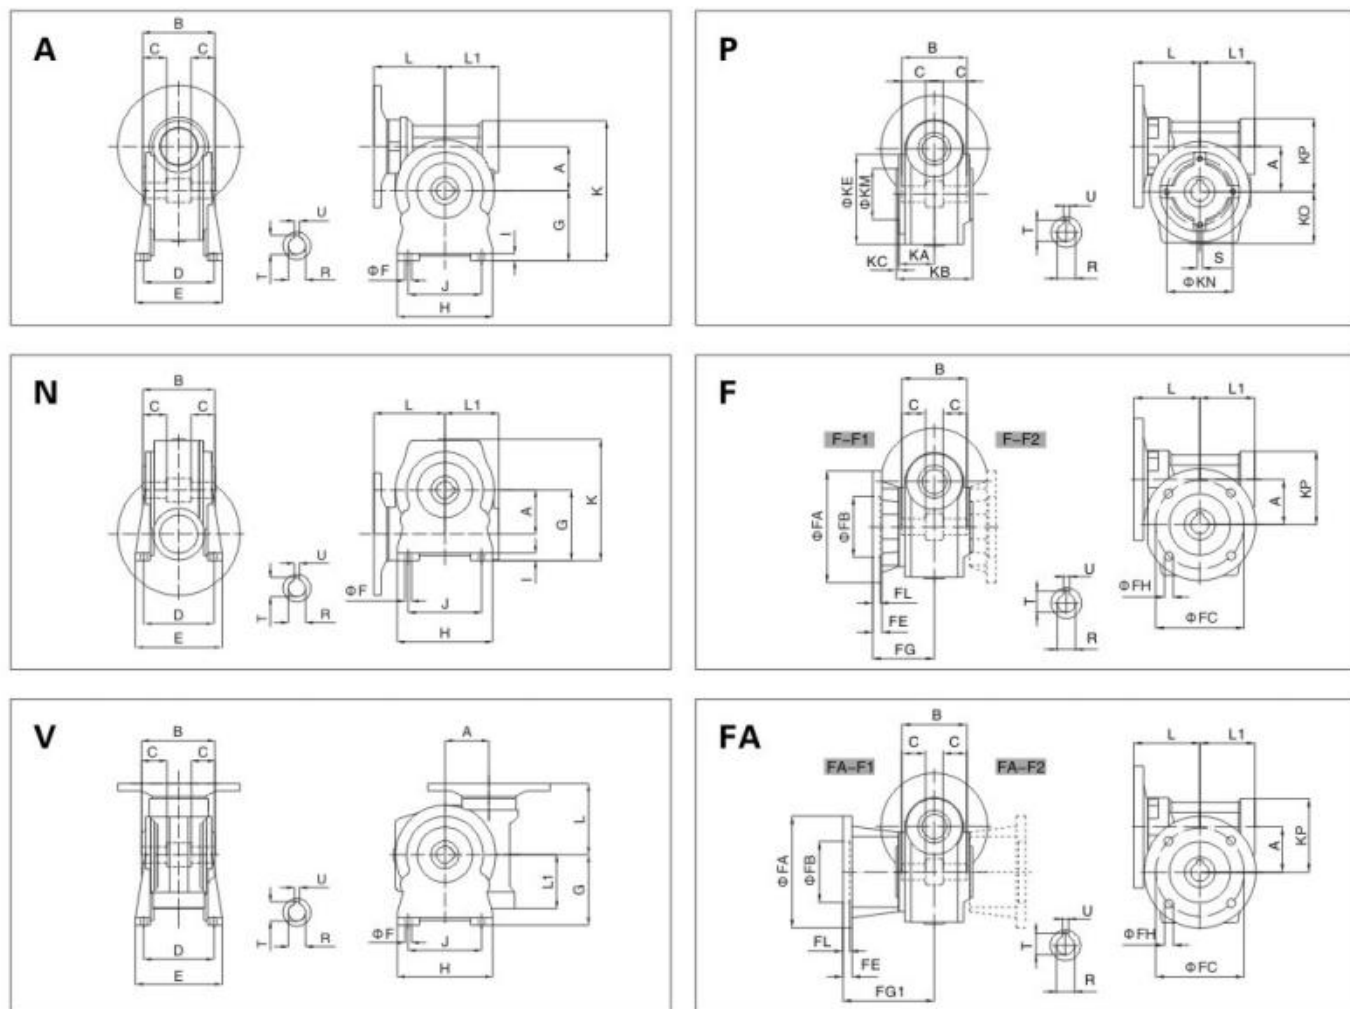

型号Type	A	B	C	D	E	ΦF	G	H	I	J	K	L	L1	ΦKE	ΦKM	ΦKN	KA
VF30	30	55	20.5	66	80	6.5	55	80	8	50	105	52	46	82	50	65	30
VF44	44.6	64	2.5	81	98	8.5	72	90	10	52	143	65	54	99	50	65	35
VF49	49.5	82	22.5	98.5	124	8.5	82	110	12	63	162	70	63	107.5	68	94	37
VF63	62.17	120	40	111	143	10.5	100	140	12	95	199	95	80	110	75	90	45
VF72	72	120	40	115	142	11	115	156	12	120	229	116	88	125	90	110	46
VF86	86.9	140	45	146	186	11	142	220	14	140	280	126	110	160	110	130	66.5
VF110	110	155	45	181	220	12.5	170	270	15	200	339	153	138	200	130	165	74
VF130	130	165	52.5	191	245	16	195	310	18	220	390	185	154	250	180	215	78.5
VF150	150	175	55	211	260	18	220	330	20	240	438	190	179	250	180	215	83.5

型号Type	KB	KO	KP	S	ΦFA	ΦFB	ΦFC	ΦFH	FE	FL	FG	FG1	U	T	R	WT(KG)
VF30	63	41	50	M6x7	80	50	68	6.5	6	4	50.5		5	16.3	14	1.1
VF44	74	51	71	M6x8	110	60	87	8.5	9	7	60.5	90	6	20.8	18	2
VF49	79	56	80	M6x8	125	70	90	10	12	10	85.5	115	8	28.3	25	3
VF63	115	73	98.5	M8x14	180	115	150	10.5	11	4	86	116	8	28.3	25	6
VF72	118	83	114	M8x14	200	130	165	13	12	5	85	111	8(8)	31.3(33.3)	28(30)	8.2
VF86	140	106	138	M10x17	210	152	176	12.5	15	4	151	110.5	10	38.3	35	16.3
VF110	155	142	161	M12x21	280	170	230	13.5	20	10	50.5	172.5	12	45.3	42	32.5
VF130	165	153	195	M12x23	320	180	255	16	20	12	137.5	197.5	14	48.8	45	49
VF150	175	180	218	M14x23	350	200	290	18	22	12	145.5	220	14	53.8	50	60

功率参数表 Power coefficient tables

70N.m

型号 Type	i	ηs %	n1=1400min ⁻¹						n1=900min ⁻¹					
			n2 r/min	Mn2 N.m	Pn1 KW	An1 N	An2 N	ηD %	n2 r/min	Mn2 N.m	Pn1 KW	An1 N	An2 N	ηD %
VF30/44-245	245	29	5.7	60	0.09	140	2500	40	3.7	70	0.07	150	2500	38
VF30/44-350	350	27	4.0	60	0.07	80	2500	36	2.6	70	0.05	150	2500	38
VF30/44-420	420	25	3.3	60	0.06	-	2500	35	2.1	70	0.04	-	2500	39
VF30/44-560	560	23	2.5	60	0.05	-	2500	31	1.6	70	0.04	-	2500	29
VF30/44-700	700	21	2.0	60	0.04	-	2500	31	1.3	70	0.03	-	2500	31
VF30/44-840	840	18	1.7	60	0.04	-	2500	26	1.1	70	0.03	-	2500	26
VF30/44-1120	1120	16	1.3	60	0.03	-	2500	26	0.8	70	0.02	-	2500	29
VF30/44-1680	1680	13	0.83	60	0.02	-	2500	26	0.54	70	0.02	-	2500	20
VF30/44-2100	2100	12	0.87	60	0.02	-	2500	21	0.43	70	0.02	-	2500	16

VF30/49

100N.m

型号 Type	i	ηs %	n1=1400min ⁻¹						n1=900min ⁻¹					
			n2 r/min	Mn2 N.m	Pn1 KW	An1 N	An2 N	ηD %	n2 r/min	Mn2 N.m	Pn1 KW	An1 N	An2 N	ηD %
VF30/49-240	240	32	5.8	95	0.13	80	3450	45	3.8	100	0.09	150	3450	44
VF30/49-315	315	24	4.4	95	0.11	140	3450	40	2.9	100	0.07	150	3450	43
VF30/49-420	420	24	3.3	95	0.08	-	3450	41	2.1	100	0.06	-	3450	37
VF30/49-540	540	22	2.6	95	0.07	-	3450	37	1.7	100	0.05	-	3450	35
VF30/49-720	720	20	1.9	95	0.05	-	3450	39	1.3	100	0.04	-	3450	33
VF30/49-900	900	18	1.6	95	0.05	-	3450	31	1.0	100	0.04	-	3450	26
VF30/49-1120	1120	15	1.3	95	0.04	-	3450	31	0.8	100	0.03	-	3450	28
VF30/49-1440	1440	14	0.97	95	0.04	-	3450	24	0.63	100	0.03	-	3450	22
VF30/49-2160	2160	11	0.65	95	0.03	-	3450	21	0.42	100	0.02	-	3450	22
VF30/49-2700	2700	10	0.52	95	0.03	-	3450	17	0.33	100	0.02	-	3450	17

VF30/63

220N.m

型号 Type	i	ηs %	n1=1400min ⁻¹						n1=900min ⁻¹					
			n2 r/min	Mn2 N.m	Pn1 KW	An1 N	An2 N	ηD %	n2 r/min	Mn2 N.m	Pn1 KW	An1 N	An2 N	ηD %
VF30/63-240	240	33	5.8	200	0.26	80	5000	47	3.8	220	0.19	150	5000	45
VF30/63-315	315	26	4.4	200	0.22	140	5000	42	2.9	220	0.16	150	5000	41
VF30/63-450	450	25	3.1	200	0.16	-	5000	41	2.0	220	0.11	-	5000	42
VF30/63-570	570	22	2.5	200	0.13	-	5000	40	1.6	220	0.09	-	5000	36
VF30/63-720	720	21	1.9	200	0.11	-	5000	37	1.3	220	0.09	-	5000	32
VF30/63-900	900	18	1.6	200	0.11	-	5000	30	1.0	220	0.08	-	5000	29
VF30/63-1200	1200	16	1.2	200	0.10	-	5000	24	0.75	220	0.07	-	5000	25
VF30/63-1520	1520	14	0.92	200	0.08	-	5000	24	0.59	220	0.06	-	5000	23
VF30/63-2280	2280	12	0.61	200	0.06	-	5000	21	0.39	220	0.04	-	5000	23
VF30/63-2700	2700	11	0.52	200	0.05	-	5000	22	0.33	220	0.04	-	5000	19

VF44/72

320N.m

型号 Type	i	ηs %	n1=1400min ⁻¹						n1=900min ⁻¹					
			n2 r/min	Mn2 N.m	Pn1 KW	An1 N	An2 N	ηD %	n2 r/min	Mn2 N.m	Pn1 KW	An1 N	An2 N	ηD %
VF44/72-250	250	34	5.6	300	0.31	220	5750	57	3.6	320	0.23	220	5750	52
VF44/72-300	300	30	4.7	300	0.29	220	5750	51	3	320	0.22	220	5750	46
VF44/72-400	400	26	3.5	300	0.24	220	5750	46	2.3	320	0.18	220	5750	42
VF44/72-525	525	25	2.7	300	0.19	220	5750	44	1.7	320	0.14	220	5750	41
VF44/72-700	700	24	2.0	300	0.15	220	5750	42	1.3	320	0.11	220	5750	39
VF44/72-920	920	21	1.5	300	0.12	-	5750	40	0.98	320	0.09	60	5750	36
VF44/72-1200	1200	18	1.2	300	0.10	-	5750	37	0.75	320	0.08	220	5750	31
VF44/72-1500	1500	17	0.93	300	0.08	220	5750	37	0.60	320	0.07	220	5750	29
VF44/72-2100	2100	14	0.67	300	0.07	220	5750	30	0.43	320	0.06	220	5750	24
VF44/72-2800	2800	12	0.50	300	0.06	220	5750	26	0.32	320	0.05	220	5750	22